

## Dickson Road, Blackpool, Glasstex overlay reinforcement UK. 1999

**11,000m<sup>2</sup> of Glasstex<sup>®</sup> was successfully installed in only 3 days, despite the winter period so minimising construction time and traffic disruption**



### BENEFITS TO CLIENT

11,000m<sup>2</sup> of Glasstex was successfully installed in only 3 days, despite the winter period so minimising construction time and traffic disruption. The asphalt overlay life has been extended and after 8 years the pavement shows no sign of distress.

### THE PROBLEM

The central 5m of road consisted of a concrete slab with tram rails set in, some 50mm below the surface. The remaining width of carriageway was asphalt on sandstone pitching (setts). These different sub-strata resulted in differential movement and reflective cracking in the asphalt.

### THE SOLUTION

All the existing asphalt was planed off and Glasstex<sup>®</sup> P100 was machine installed on to a 25mm regulated surface and covered with a 40mm surfacing layer. The Glasstex<sup>®</sup> composite consists of a paving felt that acts as a strain alleviating membrane interlayer (SAMI) which is factory stitched to a grid of high tenacity glass fibre yarns that provide additional tensile strength to the overlay.

## PROJECT DESCRIPTION


The existing asphalt was milled off to a depth of 50mm and a pre-regulated asphalt surface 25mm thick was placed. 200 pen bitumen spray was then applied and 11,000 m<sup>2</sup> of Glasstex<sup>®</sup> P100 was installed using a purpose built lay-down machine for speed and accuracy by specialist installer AGS Ltd, now operating as Foster Contracting Ltd. A 14mm stone mastic asphalt (SMA), 40mm thick surfacing course was then placed directly on to the Glasstex<sup>®</sup>.



Glasstex<sup>®</sup> is rapidly machine installed



Surfacing is placed directly on Glasstex<sup>®</sup>

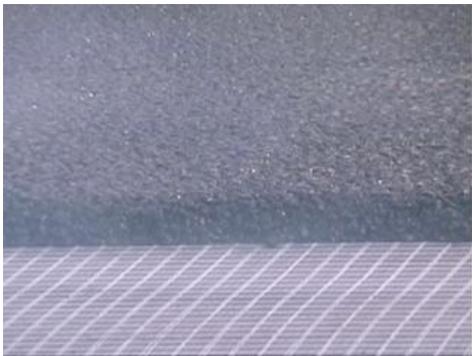

40mm thick SMA surfacing



No sign of cracking after 8 years in service

Mr Bob Sutcliffe, Senior Engineer with Blackpool Borough Council reported that "After over 8 years in service we are happy with the performance of the Glasstex<sup>®</sup> reinforced overlay which is showing no signs of the re-emergence of cracking problems. We would certainly consider the use of this product in similar circumstances"

## CONTRACT DETAILS

Client: Blackpool Borough Council

Contractor: Tarmac National Contracting Limited (formerly Tarmac Johnston Limited)

Asphalt Reinforcement Installer: Foster Contracting Limited

**Tensar**<sup>®</sup>

THE COMPANY  
YOU CAN BUILD ON<sup>™</sup>

Tensar International Limited  
Cunningham Court  
Shadsworth Business Park  
Blackburn BB1 2QX  
United Kingdom  
Telephone: +44 (0) 1254 262431  
Facsimile: +44 (0) 1254 266867  
Email: [info@tensar.co.uk](mailto:info@tensar.co.uk)  
[www.tensar-international.com](http://www.tensar-international.com)

**FCL**  
Foster Contracting Limited

Foster Contracting Limited  
Head Office and Southern Depot  
Maldon Road  
Kelvedon  
Colchester CO5 9BA  
Essex  
Telephone: 01376 570345  
Email: [kelvedon@fostercontracting.co.uk](mailto:kelvedon@fostercontracting.co.uk)  
[www.fostercontracting.co.uk](http://www.fostercontracting.co.uk)